


Add-On Triple Jump

by Clip and Go Agility

Assembly instructions:

- 1.) Separate jump cups using cutters or a razor blade knife.
- 2.) Attach jump cups to the side panel by inserting the jump cup peg into the upper hole and then fastening the cup thru the lower hole using the provided screws and nuts.
- 3.) Repeat step 2 for the second panel. Make sure to attach the cup to the opposite side making one LH and one RH panel.
- 4.) Insert the PVC pipe into the hole at the bottom of each panel and attach end caps to pipe.

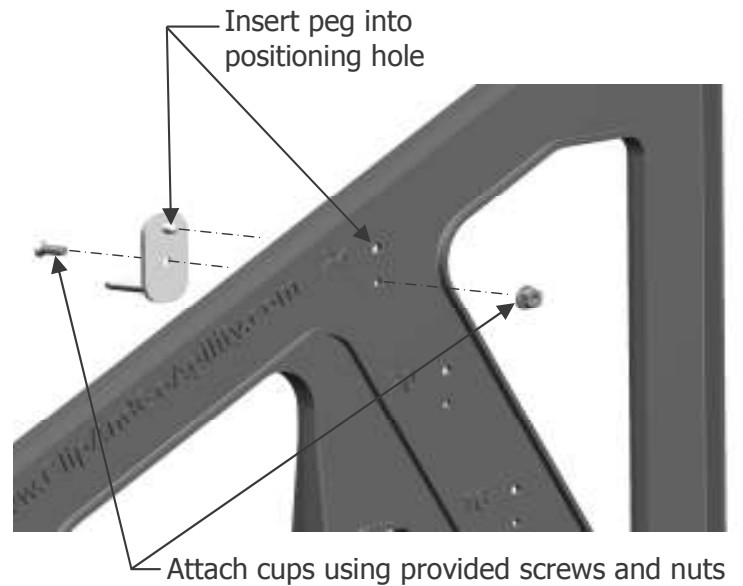


To use your Add-On Triple position the bottom tabs on the panel along the inside of your single jump leg, then push the jump forward until the front tab is lined up with the jump upright.

Note:
Jumps bars will need to be the same length

Maximum length of the jump foot is 9 1/2 inches

Position front tab up against jump upright

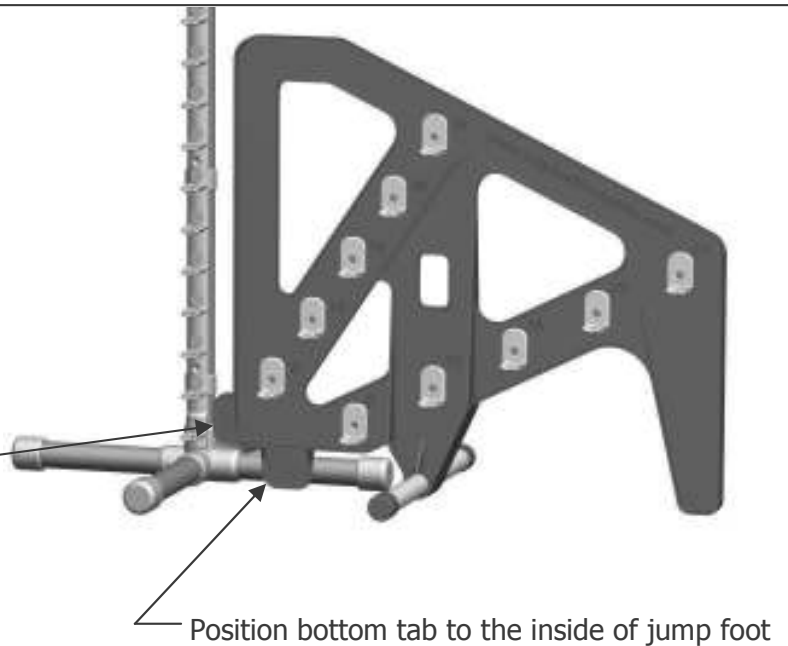

Please direct any questions about your new Add-On Triple Jump to:

